

# Maximize Power Integrity

## CELLTRON MAX

VERSATILE BATTERY ANALYSIS SYSTEM



**CELLTRON<sup>®</sup> MAX** is the next generation of Stationary battery management. The **CELLTRON MAX** is built on years of proven Conductance Technology and field expertise combined with state-of-the-art analysis technology and fully integrates with Midtronics **CELLTRAQ<sup>™</sup>** Enterprise Asset Management System. New features like referenceless testing and technician guidance for setup and results analysis make the **CELLTRON MAX** a truly intuitive tool.

### Features:

- Integrated site trending for highest accuracy in battery state-of-health analysis
- Full compatibility with Midtronics **CELLTRAQ** Battery Management system for simple, efficient data tracking, reporting and decision making
- Midtronics advanced data analysis algorithms for state of health indication and recommendation
- Midtronics **MULTI-SCOPE<sup>™</sup>** multiple frequency analysis for a full picture inside of the battery
- Integrated battery temperature measurement
- Starting / cranking battery test capability along with traditional stationary battery testing
- Dual screens for simplified setup and technician interface
- Integrated data storage with USB connectivity

### Advantages:

- The first Stationary Battery Analyzer with specialized battery and system diagnostic algorithms for enhanced system reliability and technician efficiency
- Multiple data storage and movement options
- Midtronics field-proven user friendly menus and interface
- Key battery health parameter (temperature) automatically captured for improved analysis accuracy
- The first patented multi-frequency battery specific analysis device



# CELLTRON MAX

## Versatile Battery Analysis System

### Specifications

**Model Number:**  
CMA-7000

**Applications:**  
Tests individual lead acid cells or monoblocs (up to 16 Volts) in any common configuration, approximately 10-6000 Ah.

**Voltage:**  
1.5 - 20.0 Volts DC

**Conductance:**  
100 - 19,990 Siemens

**Test Data Storage:**  
500 string locations of 480 test results stored internally

**Accuracy:**  
+ 2% across test range

**Voltmeter Resolution:**  
5 mV

User Programmable Functions:

- Preset values for over 250 battery types
- Low voltage alarm setting
- Low conductance warning
- Low conductance failure
- Test mode (push button/auto start)

**Calibration:**  
Auto-calibration prior to every test, no future calibration required

#### Connectorized Test

##### Cable Options:

- Dual contact clamps
- Dual contact probes
- Custom cables by quotation

**Power Requirements:**  
7.2V, 2500mAh for milli-ampere hours, NiMH  
Internal swappable battery & charger

**Displays:**  
LCD - FSTN  
2.619 in x 1.309 in, 128 x 64 pixels, 40 degree viewing angle, contrast ratio 8, Green LED backlight

**Keypad:**  
Stainless-steel dome, polycarbonate overlay, 1,000,000 actuations

**Data Transfer:**  
USB, Infra-red, half-duplex IRDA protocol

**Environmental Operating Range:**  
0 to +40°C, 95% relative humidity, non-condensing

**Storage Temperature:**  
-20 to 82°C

**Over Voltage Protection:**

- Auto-reset disconnect
- Reverse polarity protected

**Housing Material:**  
Acid resistant ABS plastic santoprene overmold

**Analyzer Dimensions:**  
11 in x 4 in x 3 in  
280 mm x 105 mm x 80 mm


**Case Dimensions:**  
19 in x 15.5 in x 7 in  
485 mm x 395 mm x 180 mm

**Analyzer Weight:**  
2.6 lb

**CMA-7000 Test Kit Shipping Weight:**  
Approximately 11 lb



USB connection for easy exchange and storage of data

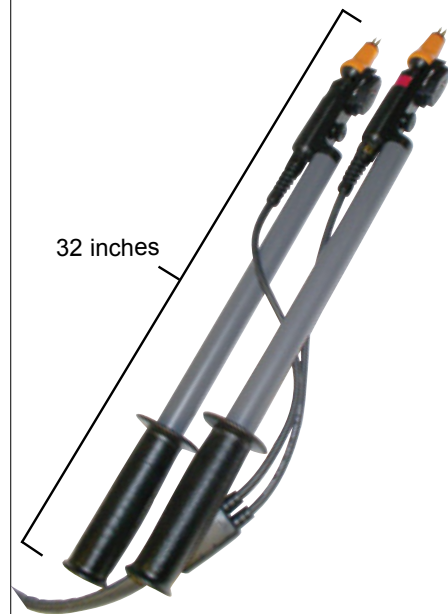

Break-apart probe extensions allow for cabinet access and easy storage

**MIDTRONICS**



Stationary Power

[www.midtronics.com](http://www.midtronics.com)

#### Corporate Headquarters

Willowbrook, IL USA  
Phone: 1.630.323.2800

Canadian Inquiries

Toll Free: 1.866.592.8053

#### Midtronics b.v.

European Headquarters  
Houten, The Netherlands  
Serving Europe, Africa, the Middle East,  
and The Netherlands

Phone: +31 306 868 150

#### European Sales Locations

Houten, The Netherlands  
Paris, France, Dusseldorf, Germany

#### Midtronics China Office

China Operations  
Shenzhen, China  
Phone: +86 755 8202 2037

#### Midtronics India

Mumbai, India  
Phone: +91.989 237 6661

#### Latin America Asia/Pacific (excluding China)

Contact Corporate Headquarters  
Phone: +1.630.323.2800